


OSPFv3 Address Families Configuration Lab

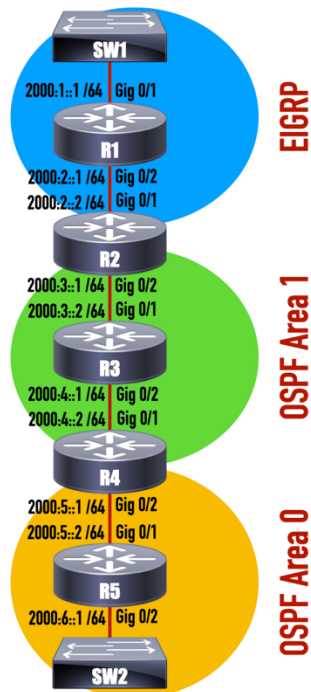

Lab Tasks:

- Configure OSPFv3 for R3, R4, and R5 using the address families method
- All R3 interfaces are in Area 1
- R4's Gig 0/1 interface is in Area 1
- R4's Gig 0/2 interface is in Area 0
- All R5 interfaces are in Area 0
- R1 and R2 are already configured for routing